

Rec'd PCT/PTO 16 OCT 2004



PCT/GB 2003 / 0 0 1 7 6 6

10/911620 #2

INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 05 JUN 2003

WIPO

PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 21 May 2003

### Best Available Copy

s Form 1/77

Act 1977


The  
Patent  
Office

13MAY02 E717990-1 002835  
P01/7700 0.00-0210862.9

1/77

est for grant of a patent

notes on the back of this form. You can also get  
a statutory leaflet from the Patent Office to help  
fill in this form)



The Patent Office

Cardiff Road, Newport  
South Wales NP9 1RH

our reference

IJB/P400230

Patent application number  
(the Patent Office will fill in this part)

0210862.9

11 MAY 2002

Full name, address and postcode of the or of  
each applicant (underline all surnames)

CEDARDELL LIMITED  
WARDENS END  
LOW WARDEN  
HEXHAM  
NORTHUMBERLAND NE46 5SN

Patents ADP number (if you know it)

If the applicant is a corporate body, give the  
country/state of its incorporation

ENGLAND

SSS 1387 001

Title of the invention

METHOD OF INSERTING A COMMUNICATIONS  
MODULE INTO A WIRELESS COMMUNICATION  
SYSTEM

Name of your agent (if you have one)

URQUHART-DYKES & LORD  
ST NICHOLAS CHAMBERS  
AMEN CORNER  
NEWCASTLE UPON TYNE  
NE1 1PE

Address for service" in the United Kingdom  
to which all correspondence should be sent  
including the postcode)

Patents ADP number (if you know it)

00001644019

If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and (if you know it) the or  
each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day/month/year)

If this application is divided or otherwise  
derived from an earlier UK application, give  
its number and the filing date of the earlier  
application

Number of earlier application

Date of filing  
(day/month/year)

Do you make a statement of inventorship and or right to  
grant of a patent required in support of this  
request? (Answer "Yes" if:)

YES

any applicant named in part 3 is not an inventor; or  
there is an inventor who is not named as an  
applicant; or  
any named applicant is a corporate body;  
note (d)

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	6
Claim(s)	3
Abstract	
Drawing(s)	1

If you are also filing any of the following items state how many against each item:

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (patents form 7/77)

Request for preliminary examination and search (patents form 9/77)

Request for substantive examination (patents form 10/77)

Any other documents (please specify)

I/We request the grant of a patent on the basis of this application.

Signature

Date 10/05/02

  
URQUHART-DYKES & LORD

Name and daytime telephone number of person to contact in the United Kingdom

MARTIN VINSOME - 0191 2618573

When an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office. If an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and no direction prohibiting publication or communication has been given, or any such direction has been revoked.

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and refer to the "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" Patents Form 7/77 will need to be filed.

If you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

Method of inserting a communications  
module into a wireless communication system

The present invention relates to a method of inserting a communications module into a wireless communications system.

Wireless communications systems are known which comprise at least one control module and a plurality of communications modules arranged such that the system can transmit messages either directly or indirectly between modules. In configuring the system, a decision needs to be made as to which modules communicate directly with which other modules. This decision is often made on the basis of received signal strength indication (RSSI) measurements, which measure the intensity of radio frequency radiation (i.e. based on the electric or magnetic field strength of the radio frequency radiation received at a particular receiving module). Communication links are then set up on the basis of these measurements, based on the assumption that the communication link from a particular transmitting module will be most effective with that receiving module which receives the radio frequency signal of highest intensity.

However, the existing system suffers from the drawback that the assumption that a receiving module receiving a signal of high intensity will also be able to effectively receive messages cannot always be made. For example, in urban locations where signals are reflected or obstructed by buildings, a signal of high intensity may be received, but interference effects may prevent the message carried by that signal from being decoded.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to the present invention, there is provided a method of inserting a communications module into a wireless communication system comprising at least one control module and

a plurality of first communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules, and wherein each said first communications module is adapted to receive a wireless message and transmit said message to a further first communications module or to a said control module, and is programmed with at least one respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:-

(i) causing a second communications module, which is to be inserted into the system, to transmit a plurality of first messages in a set up mode, wherein at least two said first messages are transmitted at different power levels and contain data representing said power levels;

(ii) causing said second communications module to be installed to communicate directly, when in said communication mode, with at least one said communications module which correctly received a said first message.

By arranging the second communications module to communicate directly with a first communications module which correctly received a said first message, this provides the advantage of not relying on the assumption that the most reliable communications link is with the first module receiving the signal of highest intensity. This in turn provides the advantage that the system is more reliable than the prior art.

The method may further comprise the step of causing said second communications module to be installed to communicate directly, when in said communication mode, with at least two said communications modules which correctly received a said first message.

The method may further comprise the step of causing said second communications module to communicate directly with the pair of

first communications modules which directly received a said first message most reliably.

The method may further comprise the step of allocating points to each said first message received by said first communications modules, wherein first messages received at lower power levels are allocated larger numbers of points, and said second communications module is caused to communicate directly, when in said communication mode, with the pair of modules allocated the largest total number of points for first messages received from said second communications module.

This provides the advantage of setting up communications links, in the case of the second communications module being adapted to communication with two first communications modules, on the basis of the best overall receipt of first messages by a pair of first communications modules, and thus avoids the situation in which the second communications module is caused to communicate with a first communications module which receives messages well and a first communications module which receives messages badly.

The second communications module may be caused to be installed by means of a second message, from at least one said control module updating the address of a said first module which correctly received a said first message.

The method may further comprise the step of causing said second module to communicate directly with the first communications module which correctly received a said first message transmitted at lowest power level.

The method may further comprise the step of causing said second communications module to communicate with the first communications module which correctly received a said first signal at the largest number of different power levels.

The first messages may be transmitted at at least three different power levels.

The method may further comprise the step of setting the power level of transmission from said second communications module in said communication mode to a predetermined first communications module in response to the power level of a said first message received by said predetermined first communications module.

This provides the advantage of enabling the power of transmission of a particular link between the second communications module and a predetermined first communications module to be adjusted according to the reliability of receipt of the message by the first communications module. This provides the further advantage of minimising power waste.

A preferred embodiment of the invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawings, in which:-

Figure 1 is a schematic representation of a wireless communication system to which a communications module is to be added; and

Figure 2 is a representation of first message transmitted power level versus time of the unit to be added to the system of figure 1.

Referring to Figure 1, a radio frequency communication system comprises a control module 1 and communications modules 2, 3 the modules communicating with each other by means of radio frequency signals. Initially, the control module 1 is allocated address number 0 and the communications modules 2, 3 are allocated address numbers 1 and 2 respectively. The system

shown in figure 1 is set up as a loop arrangement, in which signals are transmitted from communications module 3 directly to the control module 1, so that the control module is also allocated address number 3. However, it will be understood that the present invention is also applicable to communications systems set up in a linear chain arrangement.

When a new module 4 is to be inserted into the system at the location shown in Figure 1, the new module 4 is caused to emit a first message, in a set up mode, at low, medium and high power levels, as shown in Figure 2. The message transmitted by the module 4 at each power level contains data identifying whether it has been transmitted at high, medium or low power level.

The existing modules 1, 2, 3 which correctly receive the message from the new module 4 are identified, and the system makes a decision as to which pair of modules 1, 2 or 3 should communicate directly with new module 4 on the basis of which pair of modules most reliably decoded the transmitted messages. For example, points are allocated such that three points represent a module correctly receiving a message at low power level, two points the message correctly received at medium power level, and one point represent a message correctly received at high power level. The system is then arranged to install the new module 4 into the system such that it communicates directly, when in the communications mode, with the pair of existing modules 1, 2 or 3 having the highest total number of points allocated for a message from the new module 4.

For example, if existing unit 1 receives a signal from the new unit at medium and high power levels, the module 2 receives a signal from module 4 at all three power levels, and the module 3 receives the message from module 4 at high power level only, the modules 1, 2 and 3 are allocated 3, 6 and 1 points respectively. The adjacent pair of modules 1, 2 or 3 having



the highest number of points is the pair consisting of modules 1 and 2, and the new module 4 is therefore installed in the loop between modules 1 and 2, i.e. to communicate directly with those two modules. As a result, new module 4 is allocated address number 1, and the addresses of existing modules 2 and 3 are incremented by one to address numbers 2 and 3 respectively, and the second address in control module 1 is incremented to 4.

It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only and not in any limitative sense, and that various alternations and modifications are possible without departure from the scope of the invention as defined by the appended claims.

## CLAIMS

1. A method of inserting a communications module into a wireless communication system comprising at least one control module and a plurality of first communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules, and wherein each said first communications module is adapted to receive a wireless message and transmit said message to a further first communications module or to a said control module, and is programmed with at least one respective address identifying modules with which it communicates messages directly when in a communication mode, the method comprising:-

(i) causing a second communications module, which is to be inserted into the system, to transmit a plurality of first messages in a set up mode, wherein at least two said first messages are transmitted at different power levels and contain data representing said power levels;

(ii) causing said second communications module to be installed to communicate directly, when in said communication mode, with at least one said communications module which correctly received a said first message.

2. A method according to claim 1, further comprising the step of causing said second communications module to be installed to communicate directly, when in said communication mode, with at least two said communications modules which correctly received a said first message.

3. A method according to claim 2, further comprising the step of causing said second communications module to communicate directly with the pair of first communications modules which directly received a said first message most reliably.

4. A method according to claim 3, further comprising the step of allocating points to each said first message received by said first communications modules, wherein first messages received at lower power levels are allocated larger numbers of points, and said second communications module is caused to communicate directly, when in said communication mode, with the pair of modules allocated the largest total number of points for first messages received from said second communications module.

5. A method according to any one of the preceding claims, wherein said second communications module is caused to be installed by means of a second message, from at least one said control module updating the address of a said first module which correctly received a said first message.

6. A method according to any one of the preceding claims, further comprising the step of causing said second module to communicate directly with the first communications module which correctly received a said first message transmitted at lowest power level.

7. A method according to any one of the preceding claims, further comprising the step of causing said second communications module to communicate with the first communications module which correctly received a said first signal at the largest number of different power levels.

8. A method according to any one of the preceding claims, wherein the first messages may be transmitted at at least three different power levels.

9. A method according to any one of the preceding claims, further comprising the step of setting the power level of transmission from said second communications module in said communication mode to a predetermined first communications

module in response to the power level of a said first message received by said predetermined first communications module.

10. A method of inserting a communications module into a wireless communication system comprising at least one control module and a plurality of first communications modules, wherein the system is adapted to transmit messages either directly or indirectly between modules, and wherein each said first communications module is adapted to receive a wireless message and transmit said message to a further first communications module or to a said control module, and is programmed with at least one respective address identifying modules with which it communicates messages directly when in a communication mode, the method substantially as hereinbefore described with reference to the accompanying drawings.

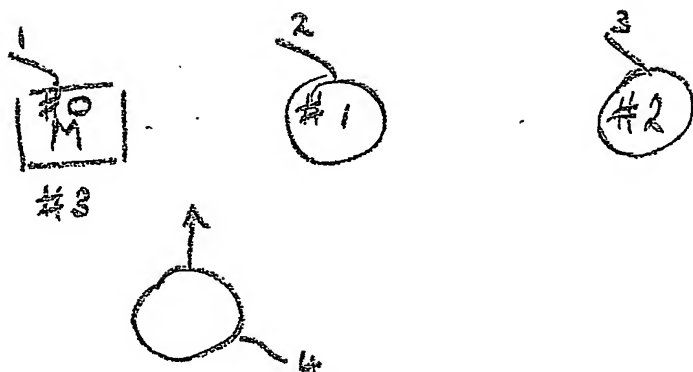


FIG. 1

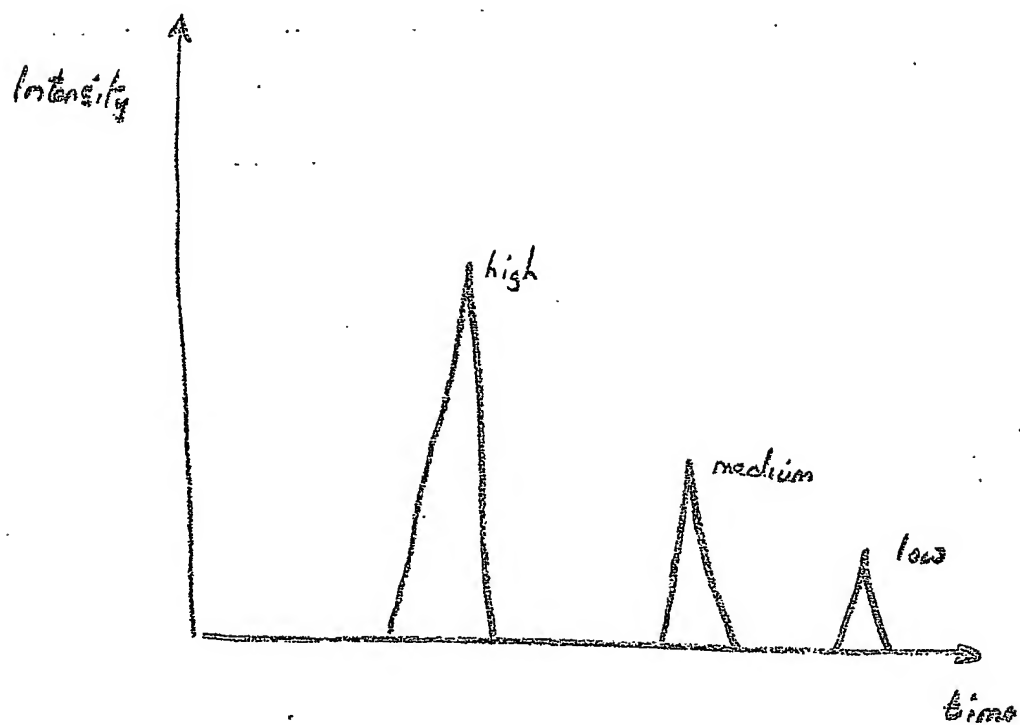


FIG. 2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**